



## COMMERCIAL SERIES (CO) ●

**120 and 240 Volts 6 Watts/Ft. (20m)  
Above Standard Ratings Are  
Heat Output At 40°F (4°C)**

### DESCRIPTION

Delta-Therm self regulating heating cable increases heat output as temperature decreases, and conversely, decreases heat output as temperature increases.

Commercial Series cables contain two parallel bus wires electrically connected by a web of PTC (positive temperature coefficient) conductive polymer. A thermoplastic elastomer jacket surrounds the cable to provide mechanical protection and electrical isolation.

A tinned copper metal braid provides additional mechanical protection as well as a ground path for fault currents.


For protection against non-organic corrosive elements, CO Series cables can also be specified with a thermoplastic elastomer overjacket.

### APPLICATIONS

***External Pipe Tracing***

### APPROVALS

Ordinary Locations: All CO Series cables are UL listed for pipe tracing when used with a PCK-C6 power connection kit.

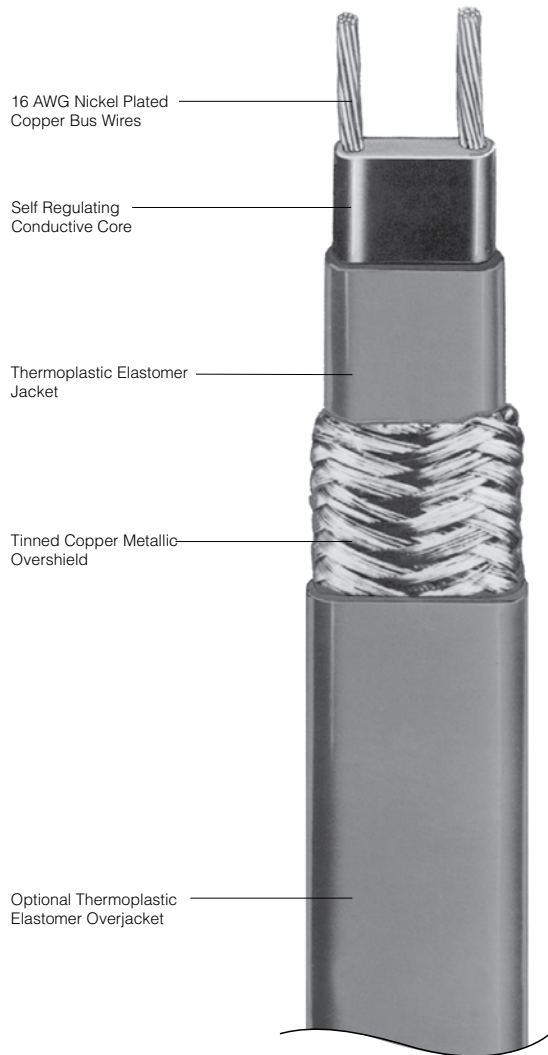

### WARNING

WARNING: This cable is designed for commercial applications and must be installed by a qualified electrician. Improper installation can result in property damage, serious injury, and/or death due to electric shock and fires.



