

DT-XP40A PANELS

Enclosed Contactor Panels



DESCRIPTION

Delta-Therm enclosed contactor panels contain all UL recognized components installed inside of a UL Listed NEMA 1 enclosure.

ENCLOSED CONTACTOR PANELS

- Contactor Rating 40FLA (50A Resistive), 600 VAC Max.
- Contactor Coil Voltage 120 VAC.
- Controls Sold Separately.

MODEL # DT-4P40A

Enclosure: NEMA 1
H/W/D: 10/8/4 Inches (25/20/10cm)
Contains: One 4 pole contactor rated at 50A (resistive)
Controls: 2 Circuits at 208/240/480 VAC or
4 Circuits at 120/277 VAC

MODEL # DT-8P40A

Enclosure: NEMA 1
H/W/D: 10/10/4 Inches (25/25/10cm)
Contains: Two 4 pole contactor rated at 50A (resistive)
Controls: 4 Circuits at 208/240/480 VAC or
8 Circuits at 120/277 VAC

MODEL # DT-12P40A

Enclosure: NEMA 1
H/W/D: 12/12/4 Inches (30/30/10cm)
Contains: Three 4 pole contactor rated at 50A (resistive)
Controls: 6 Circuits at 208/240/480 VAC or
12 Circuits at 120/277 VAC

MODEL # DT-16P40A

Enclosure: NEMA 1
H/W/D: 16/12/4 Inches (40/30/10cm)
Contains: Four 4 pole contactor rated at 50A (resistive)
Controls: 8 Circuits at 208/240/480 VAC or
16 Circuits at 120/277 VAC


APPLICATIONS

Pipe Tracing, Snow Melting, Roof Deicing, Floor Warming, Specialty Heating And Zoo Dens.

APPROVALS

UR Listed



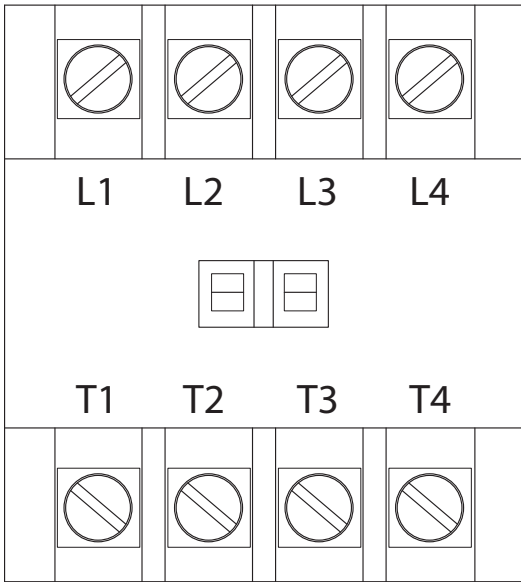

Detail 1. DT-X40A Contactor.