

## **FW-CS**

### **FloorWarner Continuity Meter/Monitor**



#### **DESCRIPTION**

The FloorWarner test unit will sound an audible alarm if the cable conductor is broken or cut, or if the cable is pinched or crushed.

With the test unit installed rest assured your floor warming cable is intact during the course of your floor construction.

Remember to never use the FloorWarner with power attached to the heating cable. Batteries included


Please call Delta-Therm at 1-800-526-7887 if you have any questions.

## FLOOR WARNER INSTRUCTIONS

1. Install the floor warming cable per the cable installation instructions. Follow all cable testing procedures as described in the cable instructions.
2. The power connection wires from the floor warming cable should be sticking out of a junction box. Prepare the power connection wire ends for termination per instructions. Do not connect electrical power, thermostat or other device to the power connection wires.
3. Momentarily switch on the FloorWarner to ensure the alarm will sound.
4. Attach the ground braid from the floor warming cable to the Floor Warner terminal with the green wire leading to the other side of the terminal.
5. Connect one inner conductor of one of the floor warming cable lead wires to the terminal with the black lead wire connected to the other side of the terminal.
6. Connect the other inner conductor of the other floor warming lead wire to the terminal with the red lead wire connected to the other side of the terminal. Refer to Details 1 and 2.
7. Turn the FloorWarner slide action switch to the ON position, the test unit should be silent.
8. Use a jumper wire to touch the terminal screw of the green/ground braid terminal to the terminal screw of the red/floor cable (Refer to illustration). The FloorWarner's audible alarm should sound.



**Detail 1.** Back of the FloorWarner, battery and screw driver supplied with order.

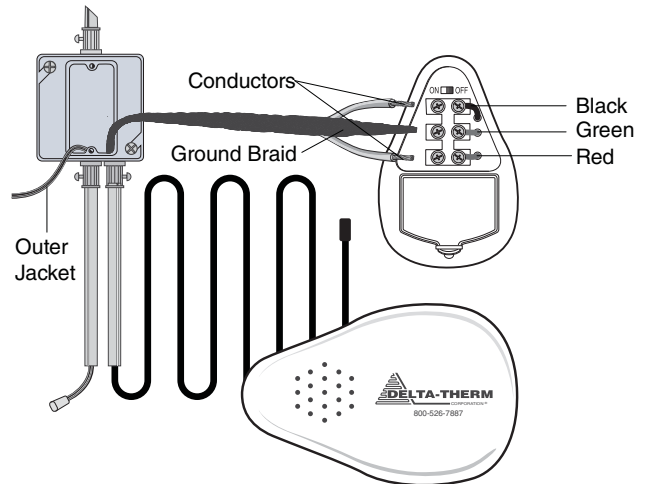

**Detail 2.** Connecting the floor warming cable to the back of the FloorWarner.

## TECHNICAL SUPPORT

A full set of installation instructions is included with order. Please call 1-800-526-7887 with any questions.