

## CAK-SRP-PA

Power Connection kit for ordinary locations  
 NPT 1/2 poly gland for PSB cable

## BARTEC

### Technical Data

<b>Ambient temperature range</b>	-40 to 185 °F / -40 to 85° C
<b>Maximum pipe temperature</b>	185 °F / 85 °C
<b>Electrical data</b>	See specifications of the trace heater used
<b>Heater dimensions</b>	FT: 0.46" x 0.22" (11.6 x 5.6 mm) ST: 0.40" x 0.19" (10.2 x 4.8 mm)




### Certifications / Approvals







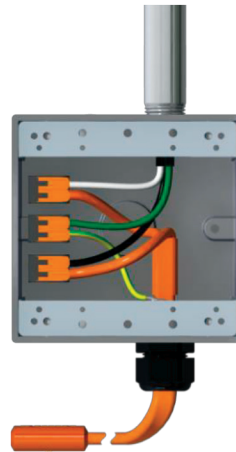



Cold applied connection system for use with a 1/2" NPT thread junction box and BARTEC BACAB PT trace heaters

### Power connection kit



### Kit Contents

The following table lists the kit contents for each of the cold applied connection systems for FT and ST trace heaters:

			
1 x Green/yellow tube for grounding braid	1 x Plastic gland body	1 x Grommet	1 x Fixing nut
			
1 x Silicone pants	2 x Terminal block	1 x Silicone adhesive	1 x End seal