

CAK-PH-A



BARTEC

Cold applied kit on pipe stand PSB/MSB/HSB cable for ordinary environment

Technical data

Ambient temperature range	-67 to 131 °F / -55 to 55° C
Max. operating temperature end seal	PSB 185 °F / 85 °C HSB 374 °F / 190 °C
Min. installation temperature	-67 °F / -55 °C
Minimum bending radius of trace heaters	1" (25 mm) Do not bend on the narrow axis.
Ingress protection	NEMA Type 4X / IP66 (if properly installed in a suitable BARTEC junction box)


Certifications / Approvals



CAK-PH-A Off pipe cable gland kit and end seal for BARTEC PSB / HSB trace heaters

Kit contents

The following table lists the kit contents for the CAK-PH-A Off pipe cable gland kit and end seal:

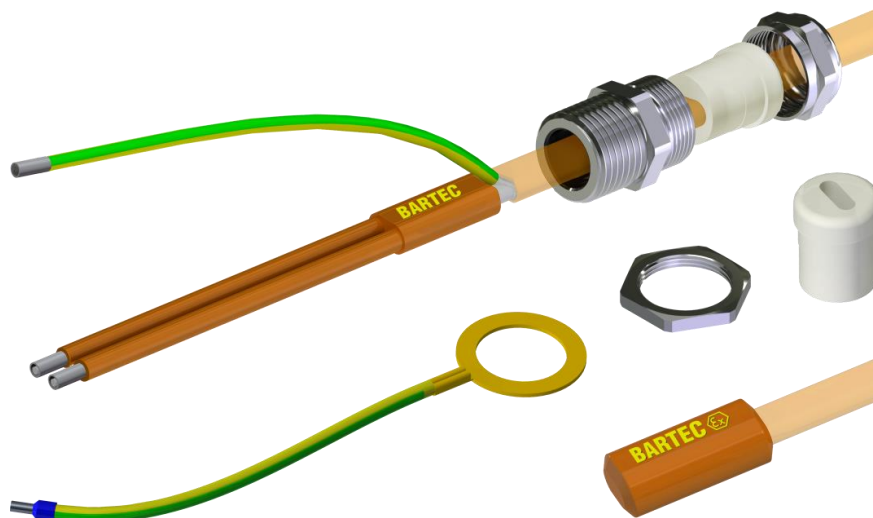

CAK-PH-A Off pipe cable gland kit and end seal



1 x
Metallic gland body




1 x
"P"-Grommet for PSB trace heaters




1 x
"H"-Grommet for HSB trace heaters



1 x
Fixing nut



1 x
Lock nut for gland body




1 x
Silicone pants



1 x
End seal



1 x
Silicone adhesive



1 x
Green/yellow tube for grounding braid



1 x
Bonding jumper



3 x
Ferrule