

## CAK-D5-A

Cold applied kit on stand for PSB/MSB/HSB cable



## BARTEC

### Technical data

Ambient temperature range	-67 to 131 °F / -55 to 55° C
Maximum pipe temperature	356 °F / 180 °C
Max. operating temperature end seal	PSB 185 °F / 85 °C HSB 374 °F / 190 °C
Min. installation temperature	-40 °F / -40 °C
Minimum bending radius of trace heaters	1" (25 mm) Do not bend on the narrow axis.
Ingress protection	NEMA Type 4X / IP66 (if properly installed in a suitable BARTEC junction box)


### Certifications / Approvals




CAK-D5-A On pipe cable gland kit and end seal for BARTEC PSB / HSB trace heaters

### Kit contents

The following table lists the kit contents for the CAK-D5-A On pipe cable gland kit and end seal:

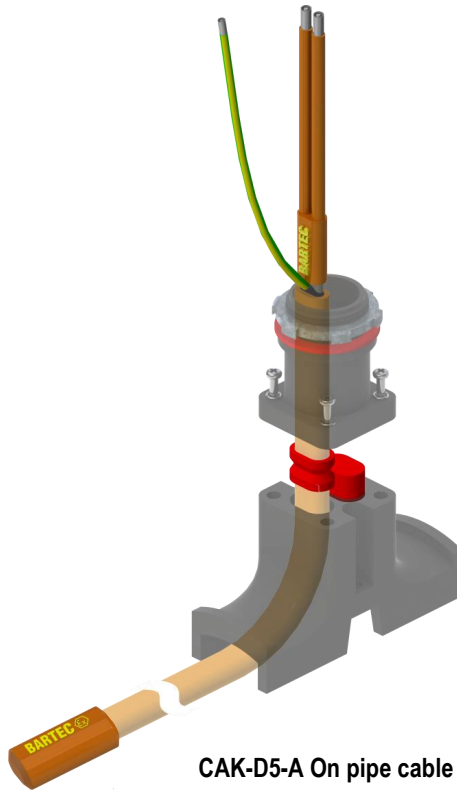

CAK-D5-A On pipe cable gland kit and end seal



1 x  
Silicone pants




1 x  
End seal



1 x  
Trace heater  
grommet



1 x  
Blind plug



1 x  
Green/yellow tube  
for grounding braid



1 x  
Silicone adhesive



3 x  
Ferrules