

CAK-SRM-HA

Power Connection kit for ordinary locations NPT 1/2 metal gland for MSB/HSB cable

BARTEC



Technical data

Ambient temperature range	-67 to 185 °F / -55 to 85 °C
Max. operating temperature end seal	374 °F / 190 °C
Electrical data	see specifications of the PT trace heater











Certifications / Approvals

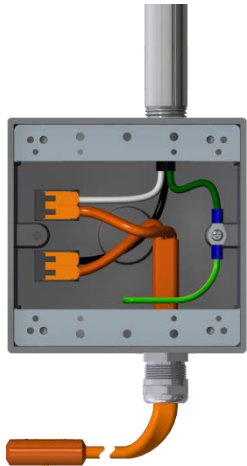

Cold applied connection system for use with a 1/2" NPT thread junction box and BARTEC BACAB PT trace heaters

Kit contents

The following table lists the kit contents for each of the cold applied connection systems for PT trace heaters:

 <p>Power connection kit</p>	 <p>1 x Silicone pants</p>	 <p>1 x Green/yellow tube for grounding braid</p>	 <p>1 x Metallic gland body</p>	 <p>1 x Grommet</p>	 <p>1 x Fixing nut</p>
	 <p>2 x Cable lug</p>	 <p>2 x Terminal block</p>	 <p>1 x Silicone adhesive</p>	 <p>1 x End seal</p>	