

## CAK-SRM-HA

## BARTEC

Power Connection kit for ordinary locations  
 NPT 1/2 metal gland for MSB/HSB cable

### Technical Data

<b>Ambient temperature range</b>	-67 to 185 °F / -55 to 85 °C
<b>Maximum pipe temperature</b>	374 °F / 190 °C
<b>Electrical data</b>	See specifications of the PT trace heater




### Certifications / Approvals



Cold applied connection system for use with a 1/2" NPT thread junction box and BARTEC BACAB PT trace heaters

### Power connection kit

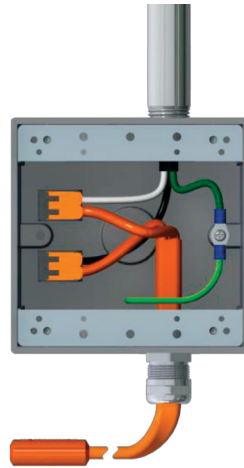

### Kit Contents

The following table lists the kit contents for each of the cold applied connection systems for PT trace heaters:



1 x Silicone pants



1 x Green/yellow tube for grounding braid



1 x Metallic gland body



1 x Grommet



1 x Fixing nut



2 x Cable lug



2 x Terminal block



1 x Silicone adhesive



1 x End seal