

## EL-CLIC Quick Connector Now Available OSR Series

A simple, quick and reliable electrical connection system.  
For **OSR-NA** and **OSR-WA** Self-Regulating Heating Cables.

### SIMPLE


- All-in-one: quick connection of 1, 2 or 3 cables.
- More manageable: no additional parts required.

### QUICK

- Save time and money: no more wire stripping.
  - Easy to install: no special tools required.
- Integrated brackets for mounting on wall or pipe.


### RELIABLE

- Sturdy, waterproof and UV-resistant box.
- Securely closed with a screw.

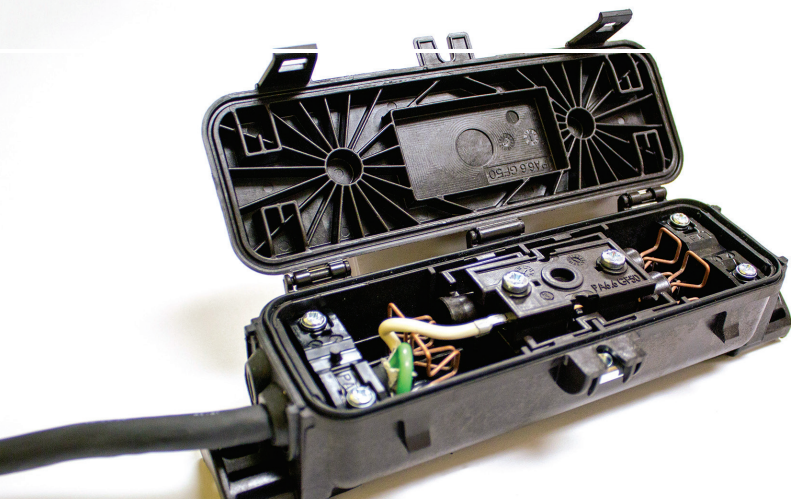

## EL-CLIC-P


Quick connector with 8' supply lead.  
 For connecting up to three self-regulating  
 heating cables to a single power supply.

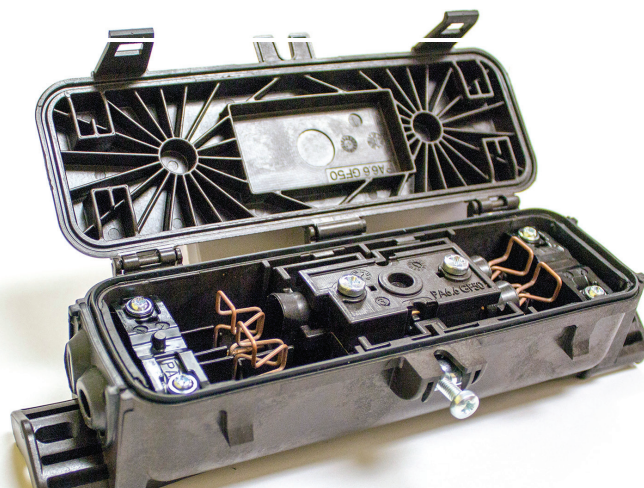

## EL-CLIC-S

Quick connector.  
 For direct connection or cold lead connection  
 of up to three self-regulating heating cables.

## TECHNICAL INFORMATION

Nominal Voltage	300V
Nominal Current	15A
Ambient Temperature	-13 °F to +212 °F -25 °C to +100 °C
Enclosure material	UV-resistant Polyamide
IP-rating	NEMA 4 equivalent (IP 65)
Approvals	 FM 17NUS0022 FM 17NCA0007
Dimensions (LxDxP)	7.5"x2.75"x2" / 190 x 70 x 50 mm
Weight, approx.	1lb
Tools required	Screwdriver, knife, pliers
Power cord/cold lead	8'/2.5 m (EL-CLIC-P), AWG 14
Cable tie	2 pcs 14"/360 mm, UV-resistant

For **OSR-NA** and **OSR-WA** Self-Regulating Heating Cables.