



# DWS-T

## Heating Cable for Snow Melting on Mat

### Features

#### Voltage

- 208V and 240V, 1-phase.

#### Construction

- Series heating cable set, twin conductor type.
- Heating cable held as a mat at regular 3" (76 mm) spacing with flexible strips.
- Fluoropolymer/XLPE resistance wire insulation 0.019" (0.5 mm) thick.
- Copper shielding (0.823 sq. mm) serves as ground.
- Polyolefin (EPR) outer sheath insulation 0.08" (2 mm) thick.

#### Watt density

- 50W/sq. ft. (538W/sq. m) at 208V and 240V, 3" (76 mm) spacing.

#### Dimension

- 24" (610 mm) and 36" (914 mm) wide mats offered in several lengths.

#### Cold lead

- 50' (15 m) long.
- Optional 100' (30 m) cold lead available upon request.
- 12 AWG or 14 AWG (according to maximum allowable load).
- PVC outer sheath insulation 0.03" (0.76 mm) thick.
- 3/8" (9.5 mm) outer diameter.

#### Included materials

- Measurements table label (to be placed in electrical panel).

#### Installation


- **Never cut or shorten the heating cable.**
- For outdoor applications only.
- The heating cable must be completely embedded in concrete, asphalt or stone dust under paving.
- Minimum installation temperature -5 °C (23 °F).
- Maximum long-term exposure temperature 105 °C (221 °F).
- Maximum exposure temperature for 10 minutes 220 °C (428 °F).

#### Warranty

- 10-year warranty on heating cable.

#### Application

- Residential driveway, sidewalk, access ramp, underground parking ramp, boarding platforms for animals.

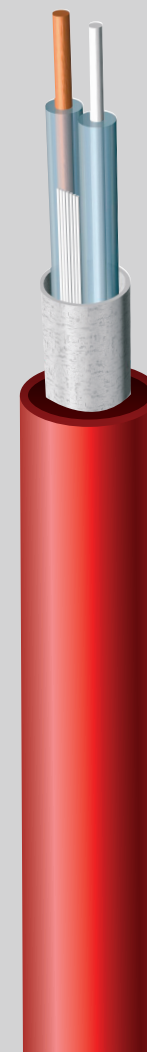



## 24 in. (610 mm) Wide Models

Watts	Product #	Product #	Amp.	Covered surface <sup>1</sup>		Mat length		Cable length <sup>2</sup>		Weight	
	208V	240V		sq. ft.	sq. m	ft.	m	ft.	m	lb	kg
500	DWS-T0508-24	DWS-T0500-24	2.08	11.0	1.0	5	1.5	43	13.1	3.0	1.4
1000	DWS-T1008-24	DWS-T1000-24	4.17	22.0	2.0	10	3.0	86	26.2	5.0	2.3
1500	DWS-T1508-24	DWS-T1500-24	6.25	32.5	3.0	15	4.6	128	39.0	7.0	3.2
2000	DWS-T2008-24	DWS-T2000-24	8.33	43.5	4.0	20	6.1	171	52.1	10.0	4.5
2500	DWS-T2508-24	DWS-T2500-24	10.42	54.0	5.0	25	7.6	214	65.2	12.5	5.7
3000	DWS-T3008-24	DWS-T3000-24	12.50	65.0	6.0	30	9.1	257	78.4	15.0	6.8
4000	DWS-T4008-24	DWS-T4000-24	16.67	86.5	8.1	40	12.2	342	104.3	20.0	9.1
5000	DWS-T5008-24	DWS-T5000-24	20.83	108.5	10.1	50	15.2	428	130.5	25.0	11.4
6000	-	DWS-T6000-24	25.00	130.0	12.1	60	18.3	513	156.4	30.0	13.6

## 36 in. (914 mm) Wide Models

Watts	Product #	Product #	Amp.	Covered surface <sup>1</sup>		Mat length		Cable length <sup>2</sup>		Weight	
	208V	240V		sq. ft.	sq. m	ft.	m	ft.	m	lb	kg
450	DWS-T0458-36	DWS-T0450-36	1.88	9.5	0.9	3	0.9	38	11.6	2.5	1.1
750	DWS-T0758-36	DWS-T0750-36	3.13	16.0	1.5	5	1.5	63	19.2	3.5	1.6
1050	DWS-T1058-36	DWS-T1050-36	4.38	22.0	2.0	7	2.1	88	26.8	5.0	2.3
1500	DWS-T1508-36	DWS-T1500-36	6.25	31.5	2.9	10	3.0	126	38.4	8.0	3.6
3000	DWS-T3008-36	DWS-T3000-36	12.50	63.5	5.9	20	6.1	251	76.5	15.0	6.8
4500	DWS-T4508-36	DWS-T4500-36	18.75	95.0	8.8	30	9.1	377	114.9	22.5	10.2
6000	-	DWS-T6000-36	25.00	126.5	11.8	40	12.2	502	153.0	30.0	13.6

<sup>1</sup> Represents the area covered by the mat including 3" (76 mm) spacing between the mat strips but excluding fixed elements to be bypassed and any other required clearances.

<sup>2</sup> Represents the total length of the heating cable if it is detached from the flexible strips.

## Installation Options

Product # Kit	Product # Factory installed*	Description
OTM-CC <sup>1</sup>	-	CableCheck – Electrical indicator
BRIPPS-75	-	75 ft. (23 m) galvanized steel cable clip strip for installation
KIT-SP2	-	Repair kit
KIT-SP4	-	Extreme case repair kit
SM-PLATE <sup>2</sup>	-	Brass marker for embedded electrical heating system
-	100 <sup>3</sup>	Optional 100' (30 m) cold lead

\* For factory installed options, add the option number to the product number.

<sup>1</sup> With any DWS-T order, the accessory OTM-CC can be added free of charge upon customer request.

<sup>2</sup> In compliance with the National Electrical Code (NEC) 426.13 Identification.

<sup>3</sup> Made to order only. Allow additional 9 to 12 weeks lead time.